

Lightweight,  
durable and  
portable

BTGO

GENIE AERIAL WORK PLATFORMS



# Customers First Always

## Partnering for Success


Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

## Providing Superior Value

Our commitment doesn't end with the sale. Our dedicated service teams provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.

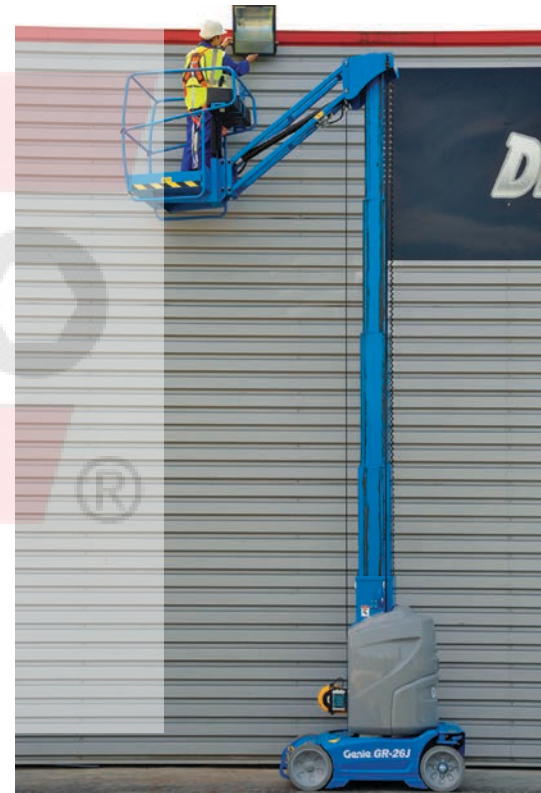

Setting the Standard: Terex Aerial Work Platforms (AWP) manufactures some of the most advanced, highest-valued lift equipment in the industry. Distinctive blue Genie® lifts set the standard for performance and durability — not to mention support from people who understand your business.



## Convenience in a Cost-Effective Package

Genie® aerial work platforms are easy to use and cost effective, making them the first choice for a wide range of applications. One person can easily set them up and get to work within minutes, providing the ideal all-around tool for almost any application. Their light weight and compact size make Genie aerial work platforms convenient to use in schools, churches, warehouses and more. Genie aerial work platforms also provide solutions for interior work on large construction sites, like high rises, as well as being perfect for light-duty construction purposes.

Genie aerial work platforms are designed to enhance productivity in the workplace. Flexible features on the AWP™, IWP™, DPL™ and Runabout™ family models offer convenience at a low cost. Their lightweight construction makes them easy to manoeuvre, use and transport, delivering excellent uptime. Each model offers a variety of options and accessories to customize your machine. Genie aerial work platforms offer an economical solution for all your access needs.

The patented Genie mast system is the most rigid in the industry.

# Convenient, Versatile Access

Genie® AWP™ Super Series aerial work platforms are an industry favorite due to their ease of use, convenience and flexibility. Their lightweight manoeuvrability and durable design make them a versatile option for a wide variety of rental, light-duty construction and maintenance applications.



## Easy Transport

The unique rear mast pivot bar and lightweight design allow it to be easily loaded into a pickup truck. Outrigger storage and forklift pockets, tie-down attachment points and an overhead crane attachment point add transportation convenience.



The Genie AWP Super Series is the top-selling aerial work platform in the industry.



## Durable Mast and Platform

The patented Genie® mast system is the most rigid in the industry. Constructed of durable aircraft-quality aluminum, the mast provides user comfort and security at all working heights.



## Doorway Access and Manoeuvrability

All units roll through standard doorways for easy access, and models up to 9.1 m (30 ft) don't need to be tilted back. An exclusive six-point wheel and caster rocker base system also manoeuvres easily around corners and over thresholds or debris.

# A Base To Fit Your Needs

Choose from three bases (standard, narrow or rough terrain) and four different platform options for the exact lift that meets your access needs.

## Standard Base

Our most popular model, perfect for everyday applications.



## Narrow Base

Working in congested areas and narrow aisles.



## Rough Terrain Base

Ideal for use on unfinished surfaces.




## User-Friendly Controls

Controls include a low battery indicator, locking key switch and dual-activated up/down switch as well as outrigger setup confirmation lights. All AC and DC models are equipped with an auxiliary platform-lowering feature for descent in the event of a power failure.



The versatility of the AWP™ Super Series provides multiple worksite solutions.

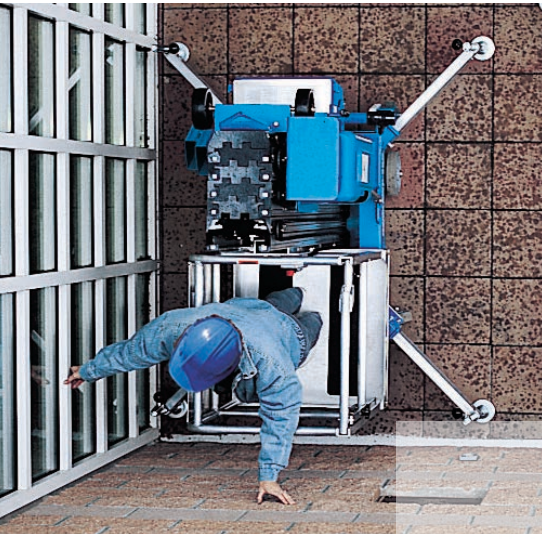

### Close Access

The compact X-pattern outrigger footprint is the smallest in the industry, allowing access as close as 8 cm (3 in) from walls. With proximity like that, you'll be within easy arm's reach of your job. Simple setup and 2 to 14 m (6 to 46 ft) of working height make the AWP Super Series the ideal choice for applications requiring close access.



### Tilt-Back

A tilt-back frame allows the AWP™-36S and AWP-40S models to roll through standard doorways.



## Aerial Work Platform Models Available

AWP-20S

AWP-25S


AWP-30S

AWP-36S

AWP-40S

# Stability and Reliability

Genie® IWP™ Super Series lifts can be easily moved around your worksite and set up in seconds. In addition, all AC and DC models are equipped with an auxiliary platform-lowering feature on both platform and ground controls, enabling descent in the event of a power failure. Reaching heights up to 11 m (35 ft 6 in), the easy-to-use IWP comes in two base models (standard and wide) with four different platform options to meet your specific application requirements.

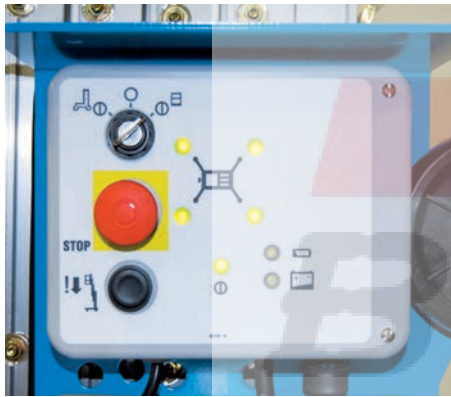

## User-Friendly Platform and Controls

Control features include a low battery indicator, locking key switch, a dual-activated up/down switch and proper setup confirmation. Select units have a ground fault interrupter receptacle on the platform for convenient use of power tools.



Easy setup in seconds quickly gets you working at heights of up to 11 m (35 ft 6 in).





### Outreach Option

Provides over 61 cm (2 ft) of additional horizontal reach (IWP™-20S only). Ideal for maneuvering up and over shelves, machinery and equipment.



### Exceptional Stability

Rigid aluminum mast provides user comfort and security, and features heavy-duty lifting chains for strength and reliability. Units also feature built-in automatic level sensing. Two front integral levelling jacks provide an additional 5 cm (2 in) of adjustability.



### Doorway Access

The standard base model easily rolls through standard doorways. The IWP-30S wide base model rolls through typical industrial double doorways.

## Industrial Work Platform Models Available

IWP-20S

IWP-25S

IWP-30S

# Convenience and Value

The Genie® DPL™ Super Series lift is a cost-effective two-worker option for indoor use only (CE). These versatile machines combine tight access manoeuvrability with ample space for two workers and their tools on the larger platform. They also offer exceptional stability with a patented aluminum mast system, heavy-duty lifting chains and a welded steel base that stands up to tough jobsite conditions. Bottom line, they're the ideal choice for big jobs in small spaces.



## Easy-to-Use Controls

Ground controls feature outrigger setup confirmation lights, low-battery indicator (DC models), and locking key switch. Dual-activated platform controls are easy to operate. Auxiliary platform lowering (from ground or platform) allows descent in the event of a power failure.



This low-cost option lifts two workers and their tools up to 12.62 m (40 ft 10 in).



### Doorway Access

The DPL™ lift rolls through standard doorways, and a convenient handle provides easy steering and maneuverability. The 4-position, non-marking swivel lock casters allow 360° rotation in areas as small as 2.24 m x .79 m (7 ft 4 in x 2 ft 7 in).



### Easy Storage and Transport

Outrigger storage sockets, multidirectional forklift pockets and sturdy tie-down attachment points help you secure the machine for easy transport. Winch attachment points let you easily winch the DPL on and off roll-back trucks.

### Smooth, Efficient Power

AC (110 V or 220 V) and DC (12 V) power options are available — delivering clean, quiet operation for indoor or outdoor use. A platform-mounted GFCI 110 V electrical outlet is standard on all models.

## Dual Personnel Lift Models Available

DPL-25S

DPL-30S

DPL-35S


# Productive Solutions

The Genie® Runabout™ family products, including the Runabout™ (GR™), the Runabout™ Contractor (GRC™) and the Runabout™ with jib (GR™-J) are ideal for warehousing, transporting, general maintenance. The construction-ready Runabout™ Contractor and the jib version of our popular Genie® Runabout™ feature a tube-in-tube telescoping mast and steel platform for durability in rougher environments. The Runabout™ with jib range is perfect for locations where superior outreach in confined spaces is required.



## Compact Accessibility

Narrow 75 to 80 cm (2 ft 5.5 in to 2 ft 7.5 in) width and 1.35 m (4 ft 5 in) length allows the GR and GRC models to fit in most passenger lifts. Units can be driven through doorways with an operator on board and have 6 cm (2.5 in) of ground clearance in stowed position.

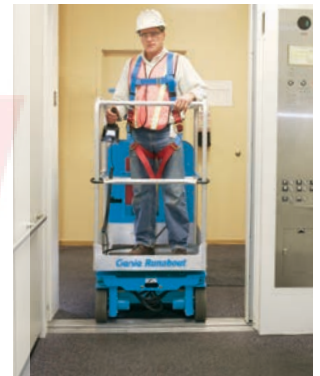

## Excellent Manoeuvrability

Features on the GR and the GRC include zero inside turning radius, 30% gradeability, a spring-applied hydraulically released brake system and 25 cm (10 in) non-marking solid rubber tyres.



## Easy Control and Service

Platform controls are equipped with on-board diagnostics. Proportional lift and drive controls provide a smooth ride. All major components are easy to access for convenient servicing.

## Reach Further

The GRC model features a standard extension deck which provides a large work space for up to two operators (44 cm, 17.5 in outreach).

Compact size and full elevation drive features deliver superior productivity.



## Genie® Runabout™ with Jib Offers More Versatility

The GR™-20J and the GR-26J respectively offer an “up-and-over” maximum clearance of 4.25 (13 ft 10.7 in) and 6.70 m (21 ft 10.5 in) and a maximum horizontal reach of 3.25 m (10 ft 7 in) and 3.15 m (10 ft 3 in). With an outstanding 140° jib range of motion and a narrow footprint the Genie Runabout with Jib offers precise positioning in restricted working areas.

## Quiet and Comfortable Drive Functions

The drive system’s variable speed DC motor makes precise adjustments in tight areas. It also provides progressive braking as soon as the joystick is released, making the unit extremely responsive. With dual rear wheel drive and a tight 0.59 m (1 ft 11 in) inside turning radius, the GR-J models easily manoeuvre around restrictive work environments to fit through congested industrial areas, corridors and hallways. Standard non-marking tyres allow use on sensitive flooring.

## Get More Done in a Small Amount of Space

Both models allow two-person occupancy indoors to get more done in a small amount of space. The 0.90 m x 0.75 m (2 ft 11 in x 2 ft 5.5 in) compact steel work platform features a low entry height of 15 cm (6 in).

## Genie® Runabout Family Models Available

GR-12 | GR-15 | GR-20 | GR-20J | GR-26J | GRC-12

# Streamlining Inventory Management

The Genie® QuickStock™ lift is designed to make your inventory picking faster, easier and safer than rolling stairs or manually propelled lifts. It is available in three Runabout™ model heights (3.48 m/11 ft 5 in, 4.47 m/14 ft 8 in, and 6.07m/19 ft 11 in) and comes in two different versions: Retail (R) or Warehouse (W). All the units are also driveable when fully elevated for increased productivity.



## QuickStock Retail Version

The Genie QuickStock lift Retail version offers standard features customized for front of the house applications. Dual flashing beacons notify surrounding people that the unit is in operation. Additionally, an obstruction sensing pad located on top of the chassis senses when an object is on the unit, causing the platform to automatically stop descending.



## QuickStock Warehouse Version

The Genie QuickStock lift Warehouse version includes the same features and benefits of the retail package, with the exception of the dual flashing beacons and the obstruction sensing pad.



## Easy to Maintain

Enclosed wiring, maintenance-free batteries and an industrially-proven design provide low machine maintenance. Light machine weight, non-marking tyres, and quick battery charging allows for quick use of the QuickStock lift on most surfaces and applications.

## Quickstock Models Available

QS-12 | QS-15 | QS-20

# A Platform for Every Job

Choose from a variety of sizes, shapes and materials to create just the right lift solution for your specific application needs.

## AWP™, IWP™ and Runabout™ Platform Options



**Standard Platform With Sliding Midrail**  
69 x 66 cm (27 x 26 in)  
An excellent general-purpose platform.



**Gated Standard Platform**  
69 x 66 cm (27 x 26 in)  
Provides "step in" entry.



**Gated Narrow Platform**  
66 x 51 cm (26 x 20 in)  
For access through standard ceiling tile.



**Gated Ultra Narrow Platform**  
56 x 46 x 114 cm (22 x 18 x 44.75 in).  
For access through other small openings.



**Standard Fiberglass Platform\***  
74 x 67 cm (29 x 26.5 in)  
A general-purpose fiberglass platform designed for containing tools and materials.

## Exclusive Quickstock™ Platform



**Stock Picker™ Platform**  
89 x 73 cm (35 x 28.5 in)  
Offers dual side entry gates and front-folding tray.

## Runabout™ Platform Option



**Sliding Mid Rail Extension Deck Platform**  
140 x 75 cm (55 x 29.5 in)  
Provides 51 cm (20 in) of horizontal outreach and a larger work area within the platform.



The narrow platform option is perfect for accessing the space above ceiling tiles.

\* Fiberglass platforms do not provide protection from electric shock.

# Options for Aerial Work Platforms



## Super-Straddle™

The Super-Straddle model allows you to use your Genie® aerial work platform in areas you never thought possible. The Super-Straddle provides up to 1.22 m (4 ft) of vertical clearance over fixed obstacles. Easily access light bulbs, ceiling panels or other maintenance tasks above permanent seating, stairwells and other obstructions. End frames adjust so the Super-Straddle can be used on slopes of up to 6 degrees — perfect for auditoriums and theaters.



## Power Wheel assist

A power wheel assist on DC models activates hydraulic forward and reverse drive for faster, easier maneuverability. This option makes navigation of the IWP™ Super Series lifts simple and effortless.



|   | AWP™-20S | AWP-25S | AWP-30S | AWP-36S | AWP-40S | IWP-20S | IWP-25S | IWP-30S | DPL-25S | DPL-30S | DPL-35S |
|---|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| <b>Base Options</b>   |          |         |         |         |         |         |         |         |         |         |         |
| STANDARD BASE   | S        | S       | S       | S       | S       | S       | S       |         | S       | S       | S       |
| ROUGH TERRAIN BASE  | 0        | 0       | 0       |         |         |         |         |         |         |         |         |
| WIDE BASE (ANSI/CE/AUS ONLY)                                |          |         |         |         |         |         |         | S       |         |         |         |
| NARROW BASE   | 0        | 0       | 0       | 0       | 0       |         |         |         |         |         |         |
| <b>Power Options</b>  |          |         |         |         |         |         |         |         |         |         |         |
| AC  | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| DC  | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| DUAL BATTERY PACKAGE  |          |         |         |         |         | 0       | 0       | 0       |         |         |         |
| AIR MOTOR   |          |         | 0       |         |         |         |         |         |         |         |         |
| <b>Other Options</b>  |          |         |         |         |         |         |         |         |         |         |         |
| TILT-BACK   |          |         |         | S       | S       |         |         |         |         |         |         |
| OUTREACH PACKAGE  |          |         |         |         |         | 0       |         |         |         |         |         |
| POWER WHEEL ASSIST  |          |         |         |         |         | 0       | 0       | 0       |         |         |         |
| <b>Accessories</b>  |          |         |         |         |         |         |         |         |         |         |         |
| NARROW BASE CONVERSION KIT*<br>(AVAILABLE FOR RT BASE ONLY) | 0        | 0       | 0       |         |         |         |         |         |         |         |         |
| RT BASE CONVERSION KIT<br>(AVAILABLE FOR NARROW BASE ONLY)  | 0        | 0       | 0       |         |         |         |         |         |         |         |         |
| SUPER STRADDLE™   | 0        | 0       | 0       | 0       | 0       |         |         |         |         |         |         |
| TOOL TRAY   | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| PLATFORM-LOCATING LASER LIGHT                               | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| FLUORESCENT TUBE CADDY                                      | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| OPERATIONAL WARNING LIGHT AND<br>DESCENT ALARM PACKAGE      | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |

\* Available aftermarket only

0 = Option S = Standard



Operational Warning Light



Fluorescent Tube Caddy  
(only available on narrow  
or standard platform)



Work Station Tray  
(not available on narrow  
or ultra-narrow platforms)

# Options for Genie® Runabout™ and Quickstock™ Models

|                          | GR™-12 | GR-15 | GR-20 | GR-20J | GR-26J | GRC™-12 | QS™-12R | QS-15R | QS-20R | QS-12W | QS-15W | QS-20W |
|--------------------------|--------|-------|-------|--------|--------|---------|---------|--------|--------|--------|--------|--------|
| <b>Platform</b>          |        |       |       |        |        |         |         |        |        |        |        |        |
| STOCK PICKER™ PLATFORM   |        |       |       |        |        |         | S       | S      | S      | S      | S      | S      |
| DUAL BIKE HOOKS          |        |       |       |        |        |         | 0       | 0      | 0      | 0      | 0      | 0      |
| FLUORESCENT TUBE CADDY   | 0      | 0     | 0     |        |        | 0       |         |        |        |        |        |        |
| AC POWER TO PLATFORM     |        |       |       | 0      | 0      |         |         |        |        |        |        |        |
| AIRLINE TO PLATFORM      |        |       |       | 0      | 0      |         |         |        |        |        |        |        |
| PLATFORM WORK LIGHTS     |        |       |       | 0      | 0      |         |         |        |        |        |        |        |
| <b>Warning</b>           |        |       |       |        |        |         |         |        |        |        |        |        |
| MOTION ALARM             | 0      | 0     | 0     |        |        | 0       | 0       | 0      | 0      | 0      | 0      | 0      |
| DUAL FLASHING BEACON     | 0      | 0     | 0     |        |        | 0       | S       | S      | S      |        |        |        |
| FLASHING BEACON          |        |       |       | 0      | 0      |         |         |        |        |        |        |        |
| AUTOMOTIVE-STYLE HORN    | 0      | 0     | 0     |        | 0      |         |         |        |        |        |        |        |
| OBSTRUCTION SENSING PAD  |        |       |       |        |        |         | S       | S      | S      |        |        |        |
| <b>Power</b>             |        |       |       |        |        |         |         |        |        |        |        |        |
| MAINTENANCE-FREE BATTERY | 0      | 0     | 0     |        |        | 0       | S       | S      | S      | S      | S      | S      |

0 = Option S = Standard



Runabout Workstation Tray



Runabout Contractor Workstation Tray



QuickStock Dual Bike Hooks

A convenient way to lift bicycles up to or down from high displays or warehouse shelving — no need for the operator to lift, maneuver or hold the bicycle in the platform. Will hold up to 20 kg (45 lbs).

# Specifications Aerial Work Platforms

| MODEL   | WORKING HEIGHT |             | WIDTH   |             | PLATFORM HEIGHT |             | LIFT CAPACITY |          |
|---|----------------|-------------|---------|-------------|-----------------|-------------|---------------|----------|
|   | METRIC         | IMPERIAL    | METRIC  | IMPERIAL    | METRIC          | IMPERIAL    | METRIC        | IMPERIAL |
| <b>Aerial Work Platforms</b>  |                |             |         |             |                 |             |               |          |
| AWP™-20S  | 8.12 m         | 26 ft 1 in  | 74 cm   | 2 ft 5 in   | 6.12 m          | 20 ft 1 in  | 159 kg        | 350 lbs  |
| AWP-25S   | 9.57 m         | 30 ft 10 in | 74 cm   | 2 ft 5 in   | 7.57 m          | 24 ft 10 in | 159 kg        | 350 lbs  |
| AWP-30S   | 11.00 m        | 35 ft 6 in  | 74 cm   | 2 ft 5 in   | 9.00 m          | 29 ft 6 in  | 159 kg        | 350 lbs  |
| AWP-36S   | 13.10 m        | 42 ft 5 in  | 74 cm   | 2 ft 5 in   | 11.10 m         | 36 ft 5 in  | 159 kg        | 350 lbs  |
| AWP-40S   | 14.29 m        | 46 ft 4 in  | 74 cm   | 2 ft 5 in   | 12.29 m         | 40 ft 4 in  | 136 kg        | 300 lbs  |
| <b>Industrial Work Platforms</b>  |                |             |         |             |                 |             |               |          |
| IWP™-20S  | 8.24 m         | 26 ft 6 in  | 81 cm   | 2 ft 8 in   | 6.24 m          | 20 ft 6 in  | 159 kg        | 350 lbs  |
| IWP-25S   | 9.44 m         | 30 ft 5 in  | 81 cm   | 2 ft 8 in   | 7.44 m          | 24 ft 5 in  | 159 kg        | 350 lbs  |
| IWP-30S   | 11.00 m        | 35 ft 6 in  | 1.02 m* | 3 ft 4 in*  | 9.00 m          | 29 ft 6 in  | 159 kg        | 350 lbs  |
| <b>Dual Personnel Lifts</b>   |                |             |         |             |                 |             |               |          |
| DPL™-25S  | 9.72 m         | 31 ft 4 in  | 80 cm   | 2 ft 7.5 in | 7.72 m          | 25 ft 4 in  | 340 kg        | 750 lbs  |
| DPL-30S   | 11.14 m        | 36 ft       | 80 cm   | 2 ft 7.5 in | 9.14 m          | 30 ft       | 340 kg        | 750 lbs  |
| DPL-35S   | 12.62 m        | 40 ft 10 in | 80 cm   | 2 ft 7.5 in | 10.62 m         | 34 ft 10 in | 272 kg        | 600 lbs  |
| <b>Self-Propelled Aerial Work Platforms (Genie® Runabout™ Family And Quickstock™)</b> |                |             |         |             |                 |             |               |          |
| GR™-12  | 5.45 m         | 17 ft 4 in  | 75 cm   | 2 ft 5.5 in | 3.45 m          | 11 ft 4 in  | 227 kg        | 500 lbs  |
| GR-15   | 6.47 m         | 20 ft 8 in  | 75 cm   | 2 ft 5.5 in | 4.47 m          | 14 ft 8 in  | 227 kg        | 500 lbs  |
| GR-20   | 8.02 m         | 25 ft 9 in  | 80 cm   | 2 ft 7.5 in | 6.02 m          | 19 ft 9 in  | 159 kg        | 350 lbs  |
| GR-20J  | 7.70 m         | 25 ft 3 in  | 99 cm   | 3 ft 3 in   | 5.70 m          | 18 ft 8 in  | 200 kg        | 440 lbs  |
| GR-26J  | 9.90 m         | 32 ft 6 in  | 99 cm   | 3 ft 3 in   | 7.90 m          | 25 ft 11 in | 200 kg        | 440 lbs  |
| GRC™-12   | 5.66 m         | 18 ft       | 80 cm   | 2 ft 7.5 in | 3.66 m          | 12 ft       | 227 kg        | 500 lbs  |
| QS™-12  | 5.45 m         | 17 ft 5 in  | 75 cm   | 2 ft 5.5 in | 3.48 m          | 11 ft 5 in  | 227 kg        | 500 lbs  |
| QS-15   | 6.47 m         | 20 ft 8 in  | 75 cm   | 2 ft 5.5 in | 4.47 m          | 14 ft 8 in  | 227 kg        | 500 lbs  |
| QS-20   | 8.02 m         | 25 ft 9 in  | 80 cm   | 2 ft 7.5 in | 6.02 m          | 19 ft 9 in  | 159 kg        | 350 lbs  |

\*Wide Base

